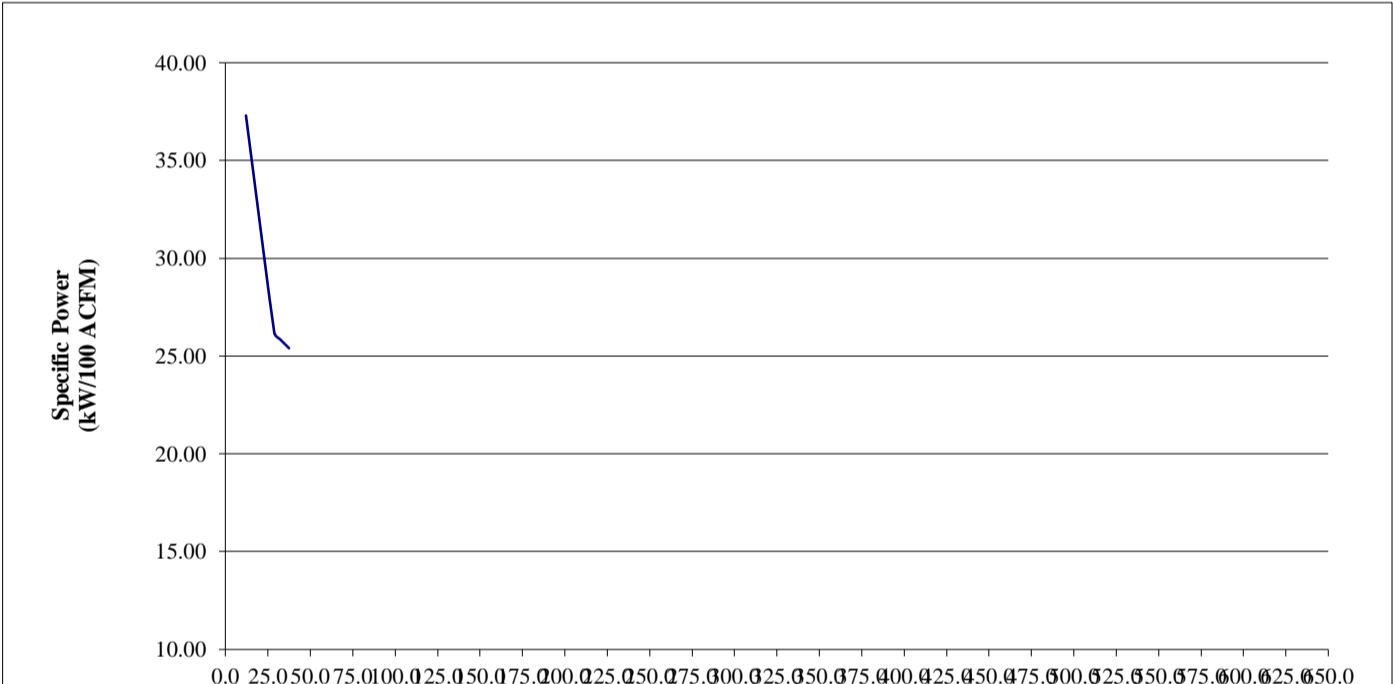


COMPRESSOR DATA SHEET

Rotary Compressor: Variable Displacement

MODEL DATA - FOR COMPRESSED AIR

| | | | |
|--|--|--------------------------------|---|
| 1 | Manufacturer: Chicago Pneumatic | | |
| 2 | Model Number: CPVsd 10 | Date: 02/15/16 | Type: Screw |
| | <input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled | # of Stages: 1 | |
| | <input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free | | |
| | Rated Operating Pressure | | 150 |
| Drive Motor Nominal Rating | | 10 | hp |
| Drive Motor Nominal Efficiency | | 91.0 | percent |
| Fan Motor Nominal Rating (if applicable) | | N/A | hp |
| Fan Motor Nominal Efficiency | | N/A | percent |
| 8* | Input Power (kW) | Capacity (acfm) ^{a,d} | Specific Power (kW/100 acfm) ^d |
| | 9.8 Max | 37.4 | 25.40 |
| | 8.4 | 31.6 | 25.90 |
| | 8.4 | 31.4 | 25.90 |
| | 7.8 | 28.7 | 26.20 |
| | 4.6 Min | 12.0 | 37.30 |
| 9* | Total Package Input Power at Zero Flow ^{c, d} | | 0.0 kW |
| 10 |  <p style="text-align: center;">Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</p> | | |

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Member

| Volume Flow Rate at specified conditions | | Volume Flow Rate | Specific Energy Consumption | No Load / Zero Flow Power |
|--|-----------------------|------------------|-----------------------------|---------------------------|
| m ³ / min | ft ³ / min | % | % | +/- 10% |
| Below 0.5 | Below 15 | +/- 7 | +/- 8 | |
| 0.5 to 1.5 | 15 to 50 | +/- 6 | +/- 7 | |
| 1.5 to 15 | 50 to 500 | +/- 5 | +/- 6 | |
| Above 15 | Above 500 | +/- 4 | +/- 5 | |

ROT 032

8/14 R1