


COMPRESSOR DATA SHEET
In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors
Rotary Compressor: Variable Frequency Drive
MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Chicago Pneumatic		
2	Model Number: CPVS 340 250kW	Date:	09/08/22
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type:	Screw
		# of Stages:	1
3*	Full Load Operating Pressure ^b	145	psig ^b
4	Drive Motor Nominal Rating	335	hp
5	Drive Motor Nominal Efficiency	95.0	percent
6	Fan Motor Nominal Rating (if applicable)	11 (2x5.5)	hp
7	Fan Motor Nominal Efficiency	89.5	percent
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	266.8	1281	20.83
	228.6	1113	20.54
	181.5	894	20.30
	135.7	666	20.38
	92.5	434	21.31
9*	Total Package Input Power at Zero Flow ^{c, d}	0.0	kW
10	Isentropic Efficiency	78.0	%
11	 <p style="text-align: center;"> Note: Graph is only a visual representation of the data in Section 8 <small>Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</small> </p>		

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

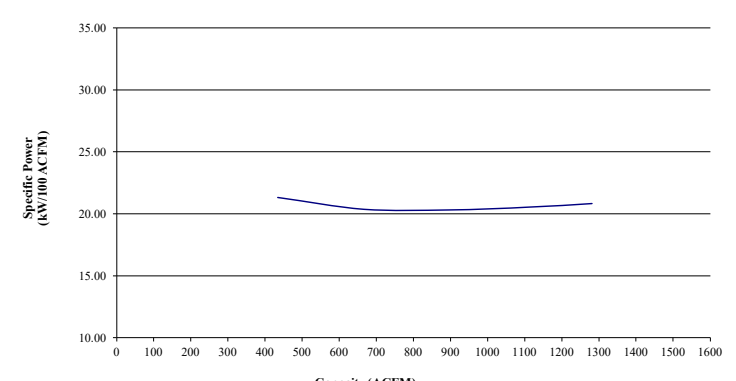

Member

NOTES:

- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO 1217, Annex E, as shown in table below:
NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m^3 / min	ft^3 / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	+/- 10%
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	

ROT 031.1