



About Chicago Pneumatic

Since 1901, the Chicago Pneumatic name has represented reliability and attention to customer needs, as a global manufacturer of power tools, air compressors, generators, light towers, and hydraulic equipment for professional and industrial applications. It represents products that are engineered for high performance. In addition to pioneering design, high-impact technology and durability, Chicago Pneumatic means customer value.

Our people start every single day with a passion to research, develop, manufacture and deliver new products that are meant to meet your needs not only today, but tomorrow as well. All this has come together because we have consistently practiced our brand promise:

People. Passion. Performance.



Maximized productivity

FIXED SPEED



| () | Noise level | 77-80 dB(A) |
|------------|-------------|------------------------------|
| = | Capacity | 307-1007 l/s 650-2134 cfm |
| Ħ. | Power | 110-355 kW 150-480 hp |
| 3 | Pressure | 0.7-1.0 mpa 7-10 bar |

User benefits

- · New design for highest reliability
- · Group screw element to ensure maximum uptime
- · Unmatched efficiency
- Air Cooled & Water Cooled variants

Top value through energy efficiency

VARIABLE SPEED



| • | Noise level | 78-80 dB(A) |
|----------|-------------|----------------------------|
| ‡ | Capacity | 98-703 l/s 208-1490 cfm |
| H | Power | 110-250 kW 150-340 hp |
| 0 | Pressure | 0.7-1.0 mpa 7-10 bar |

User benefits

- Reduce Energy use by 35%
- · More savings in every application
- Fast ROI with maximum pay back
- Lowest LCC (Life Cycle Cost)

CPF151-480

PROFESSIONAL SOLUTIONS FOR MAXIMUM PRODUCTIVITY

In the view of Chicago Pneumatic users, the logo of Chicago Pneumatic represents the features of endurable and reliable operation. New generation fixed speed of oil-injected screw compressors have been launched to fit the needs on sufficient air volume when applied in high-power industrial area.




Low operational costs

- Lower energy costs thanks to inhouse designed, high-efficiency screw element.
- Helps you move toward a green production with lower emissions.
- Monitor and optimize your compressor remotely with ICONS.

Always reliable

- · Reliable operation, even in 46°C.
- IP55-enclosed drive train for dependable performance in dusty and humid conditions.

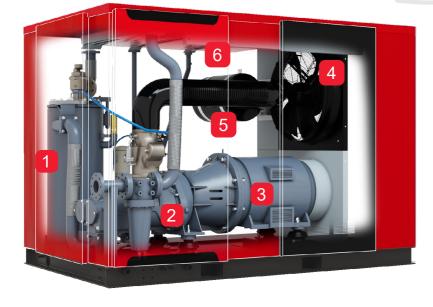

- Oil separator
- Compression element
- 3 Motor
- 4 Cooling fan
- 5 Air filter
- 6 Air/Oil Cooler

Air cooled

| | 0 | H | Þ | 3 | ‡ | | КМ | <u> </u> | Ø |
|--------|------------------|-------|-------|--------|----------|-------------|---------------------|----------|------------|
| Model | Working Pressure | Motor | Power | Capaci | ty FAD* | Noise Level | Dimensions | Weight | Connection |
| | mpa | kW | hp | l/s | cfm | dB(A) | L x W x H(mm) | kg | Size |
| | 0.7 | | | 503 | 1066 | 78 | | | DN80 |
| CPF220 | | 160 | 220 | 482 | 1020 | | 2880 x 1754 x 1930 | 2970 | |
| | 1 | | | 443 | 939 | | | | |
| | 0.7 | | | 607 | 1285 | | | | |
| CPF270 | 0.8 | 200 | 270 | 567 | 1200 | 80 | 3502 x 1754 x 1983 | 3450 | DN100 |
| | 1 | | | 517 | 1094 | | | | |
| | 0.7 | | | 755 | 1599 | 80 | 3502 x 1754 x 1983 | 3620 | DN100 |
| CPF340 | 0.8 | 250 | 340 | 713 | 1511 | | | | |
| | 1 | | | 643 | 1363 | | | | |
| CPF450 | 0.8 | 315 | 450 | 1000 | 2119 | 81 | 5141 x 1893 x 2353 | 5520 | DN125 |
| CFF430 | 1 | | | 905 | 1918 | | | | |
| | 0.7 | | | 370 | 784 | 78 | 2880 x 1754 x 1930 | | DN80 |
| CPF151 | 0.8 | 110 | 150 | 337 | 713 | | | 3140 | |
| | 1 | | | 312 | 660 | | | | |
| | 0.7 | 132 | 180 | 433 | 918 | 78 | 2880 x 1754 x 1930 | 3230 | DN80 |
| CPF181 | 0.8 | | | 412 | 872 | | | | |
| | 1 | | | 378 | 801 | | | | |
| | 0.7 | | | 515 | 1091 | | 3502 x 1754 x 1983 | 3640 | DN100 |
| CPF221 | 0.8 | 160 | 220 | 483 | 1024 | 80 | | | |
| | 1 | | | 445 | 943 | | | | |
| | 0.7 | 200 | 270 | 653 | 1384 | 77 | 4800 x 2150 x 2250 | | DN100 |
| CPF271 | 0.8 | | | 612 | 1296 | | | 5325 | |
| | 1 | | | 555 | 1176 | | | | |
| CPF341 | 0.8 | 250 | 340 | 705 | 1494 | 77 | 4800 x 2150 x 2250 | 5895 | DN100 |
| GPF341 | 1 | 250 | 340 | 656 | 1390 | 11 | 7000 A Z 130 A ZZ30 | | DIVIOU |


Water cooled

| | 0 | H | <u>.</u> | = | | 蕈 | | II) | М | <u> </u> | Ø |
|--------|------------------|-------|----------|----------|---------------|-------|---------------------|-----------------|------------|----------|---|
| Model | Working Pressure | Motor | Power | Capaci | Capacity FAD* | | Dimensions | Weight | Connection | | |
| | mpa | kW | hp | l/s | cfm | dB(A) | L x W x H(mm) | kg | Size | | |
| | 0.7 | | | 503 | 1066 | | | | | | |
| CPF220 | 0.8 | 160 | 220 | 482 | 1020 | 75 | 2880 x 1754 x 1930 | 2870 | DN80 | | |
| | 1 | | | 443 | 939 | | | Weight | | | |
| | 0.7 | | | 607 | 1285 | | | | | | |
| CPF270 | 0.8 | 200 | 270 | 567 | 1200 | 77 | 2902 x 1754 x 1980 | 3240 | DN100 | | |
| | 1 | | | 517 | 1094 | | | | | | |
| | 0.7 | | | 755 | 1599 | | 2902 x 1754 x 1980 | 3410 | DN100 | | |
| CPF340 | 0.8 | 250 | 340 | 713 | 1511 | 77 | | | | | |
| | 1 | 045 | | 643 | 1363 | | | | | | |
| CPF450 | 0.8 | 315 | 450 | 1000 | 2119 | 79 | 3491 x 1880 x 2100 | 5190 | DN125 | | |
| 311400 | 1 | | | 905 | 1918 | | | | | | |
| CPF480 | 0.8 | 355 | 480 | 1092 | 2313 | 79 | 3491 x 1880 x 2100 | 5310 | DN125 | | |
| 311400 | 1 | | 100 | 992 | 2101 | | | 0010 | | | |
| | 0.7 | 110 | 150 | 370 | 784 | 75 | 2880 x 1754 x 1930 | 3040 | DN80 | | |
| CPF151 | 0.8 | | | 337 | 713 | | | | | | |
| | 1 | | | 312 | 660 | | | | | | |
| | 0.7 | | | 433 | 918 | | | | | | |
| CPF181 | 0.8 | 132 | 180 | 412 | 872 | 75 | 2880 x 1754 x 1930 | 3130 | DN80 | | |
| | 1 | | | 378 | 801 | | | | | | |
| | 0.7 | | | 515 | 1091 | | 2902 x 1754 x 1980 | 3430 | DN100 | | |
| CPF221 | 0.8 | 160 | 220 | 483 | 1024 | 77 | | | | | |
| | 1 | | | 445 | 943 | | | | | | |
| | 0.7 | | | 653 | 1384 | | 3600 x 2150 x 2250 | | | | |
| CPF271 | 0.8 | 200 | 270 | 612 | 1296 | 77 | | 4890 | DN100 | | |
| | 1 | | | 555 | 1176 | | | | | | |
| CPF341 | 0.8 | 250 | 340 | 705 | 1494 | 77 | 3600 x 2150 x 2250 | 5460 | DN100 | | |
| 311041 | 1 | 250 | 340 | 656 | 1390 | '' | 0000 X 2 100 X 2200 | 0400 | DIVIOU | | |

CPVS 151-340 PM

VARIABLE SPEED **DRIVE FOR MAJOR ENERGY SAVINGS**

With its excellent performance on the energy saving, variable speed of oil-injected screw compressors have been recognized and applied in various industries. To comply with global green energy production and carbon emission reduction activities, Chicago Pneumatic cherishes its mission to advance the technology on variable speed compressors and launched new generation of permanent magnet oil-inject screw compressors. Max.4% energy could be saved compared to last generation. Chicago Pneumatic users will benefit more energy saving during air compressors' whole life cycle.

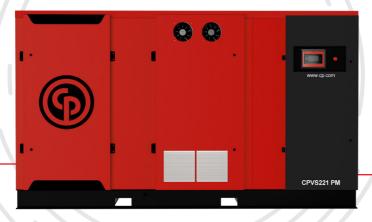


Energy saving starts from commissioning

- In-house designed drive train provides stronger power
- Integrated permanent magnet motor with ultra IE4 efficiency



Advanced connectivity

Advanced IoT technology with ICONS built-in, enable your instant monitoring your compressor

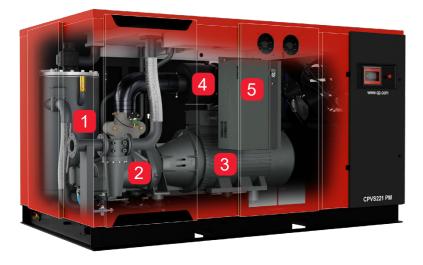

- 1 Oil separator
- 2 Compression element
- 3 Motor
- 4 Air filter
- 5 Inverter

REVOLUTIONARY DRIVE TRAIN TECHNOLOGY

Improved energy efficiency saves your money

- In-house designed PM motor with IE4/IE5 premium efficiency
- · New generation screw elements, with improved efficiency
- · Integrated direct drive transmission for minimal losses.
- · Smart inlet valve optimizes the inlet flow and improves efficiency

Increased reliability extends lifetime

- PM motor rated IP55/IP66, premium protection against dust and water ingress
- Optimal cooling at all speeds and conditions thanks to oil-cooling principle of the PM motor.



- 1 In-house designed screw elements
- 2 Direct drive train
- 3 Oil cooling motor
- 4 Smart inlet value

Air cooled


| | 0 | H | þ | Ţ | 蕈 | | Ы | <u> </u> | Ø |
|------------|------------------|-------------|-----|-------------------|---------------------|-------------|--------------------|----------|------------|
| Model | Working Pressure | Motor Power | | Capacity FAD* | | Noise Level | Dimensions | Weight | Connection |
| | mpa | kW | hp | l/s | cfm | dB(A) | L x W x H(mm) | kg | Size |
| CPVS220 PM | 0.7-1 | 160 | 220 | 127-497 | 268-1052 | 78 | 2880 x 1754 x 1930 | 2884 | DN80 |
| CPVS270 PM | 0.7-1 | 200 | 270 | 143-590 | 304-1250 | 80 | 3602 x 2104 x 2023 | 4097 | DN100 |
| CPVS340 PM | 0.7-1 | 250 | 340 | 185-703 | 392-1490 | 80 | 3602 x 2104 x 2023 | 4267 | DN100 |
| CPVS151 PM | 0.7-0.8 | 110 | 150 | 100-385 98-317 | 212-815 208-671 | 78 | 2880 x 1754 x 1930 | 2351 | DN80 |
| CPVS181 PM | 0.7-0.8 1 | 132 | 180 | 100-450 98-377 | 212-953 208-798 | 78 | 2880 x 1754 x 1930 | 2391 | DN80 |
| CPVS221 PM | 0.7-0.8 1 | 160 | 220 | 98-545 97-465 | 208-1154 205-985 | 80 | 3602 x 2104 x 2023 | 3242 | DN100 |

Water cooled

| | 0 | H | P | ₩ | | ••• | M | <u> </u> | Ø |
|------------|------------------|-------|-------|---------------|----------|-------------|--------------------|----------|------------|
| Model | Working Pressure | Motor | Power | Capacity FAD* | | Noise Level | Dimensions | Weight | Connection |
| | mpa | kW | hp | l/s | cfm | dB(A) | L x W x H(mm) | kg | Size |
| CPVS220 PM | 0.7-1 | 160 | 220 | 127-497 | 268-1052 | 78 | 2880 x 1754 x 1930 | 2779 | DN80 |
| CPVS270 PM | 0.7-1 | 200 | 270 | 143-590 | 304-1250 | 80 | 3602 x 2104 x 2023 | 3886 | DN100 |
| CPVS340 PM | 0.7-1 | 250 | 340 | 185-703 | 392-1490 | 80 | 3602 x 2104 x 2023 | 4056 | DN100 |
| CPVS151 PM | 0.7-0.8 | 110 | 150 | 100-385 | 212-815 | 78 | 2880 x 1754 x 1930 | 2246 | DN80 |
| CFV3131 FW | 1 | 110 | 130 | 98-317 | 208-671 | | | | |
| CPVS181 PM | 0.7-0.8 | 132 | 180 | 100-450 | 212-953 | 78 | 2880 x 1754 x 1930 | 2286 | DN80 |
| CFV3101 FW | 1 | 132 | 100 | 98-377 | 208-798 | | | | |
| CPVS221 PM | 0.7-0.8 | 160 | 220 | 98-545 | 208-1154 | 80 | 3602 x 2104 x 2023 | 3033 | DN100 |
| CPV3221 PW | 1 | 160 | | 97-465 | 205-985 | | | | |

We protect your efficiency

Energy costs represent about 70% of the total operating cost of your compressor over a 5 year period. That's why reducing the operating cost of a compressed air solution is a major focus. Variable frequency driven compressors can cut the energy bill of your compressor by up to 35%.

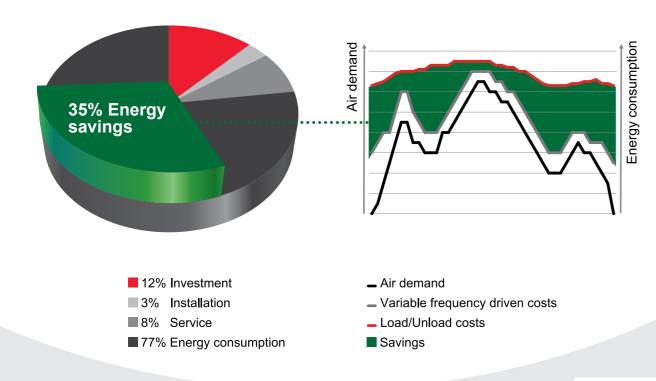

Complete your compressed air installation with an ICONS plan



What if your compressor needs service or an immediate intervention?

With an ICONS plan, you get an alert from your controller delivered straight to your computer, tablet or smartphone. Wherever you are, you can take immediate action and reduce the risk of downtime and other costs.

With connectivity



Without connectivity










WE'VE GOT YOUR COMPRESSED AIR COVERED

Of course you want to get the most out of your CPF and CPVS. Extend the Chicago Pneumatic reliability and performance throughout your compressed air system.

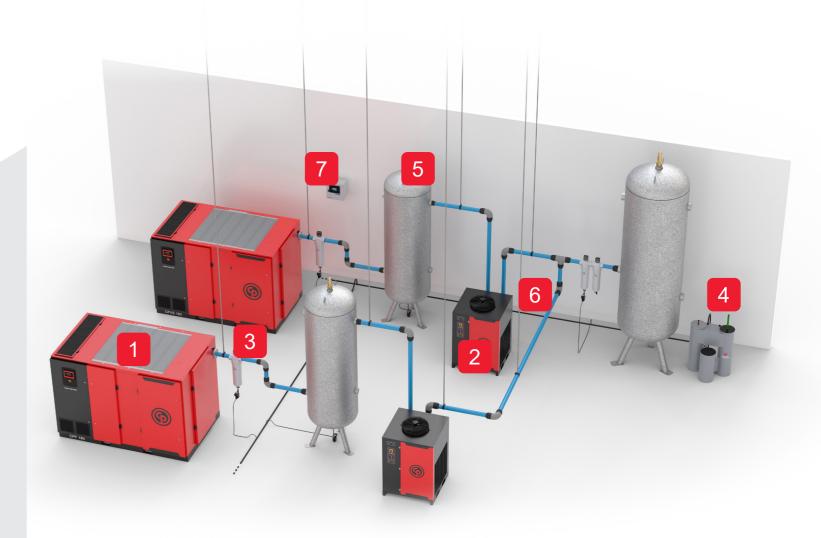

- Air compressor
- 2 Air dryer
- 3 Line filters
- 4 Oil separators

- 5 Air receiver buffer storage
- 6 Piping system
- Central controller



At Chicago Pneumatic we have a passion for performance and long-lasting partnerships. Since 1901, we have been committed to reliability based on technology and trust.



For more information, please contact your CP partner:

Use only authorized parts. Any damage or malfunction caused by the use of unauthorized parts is not covered by Warranty or Product Liability.