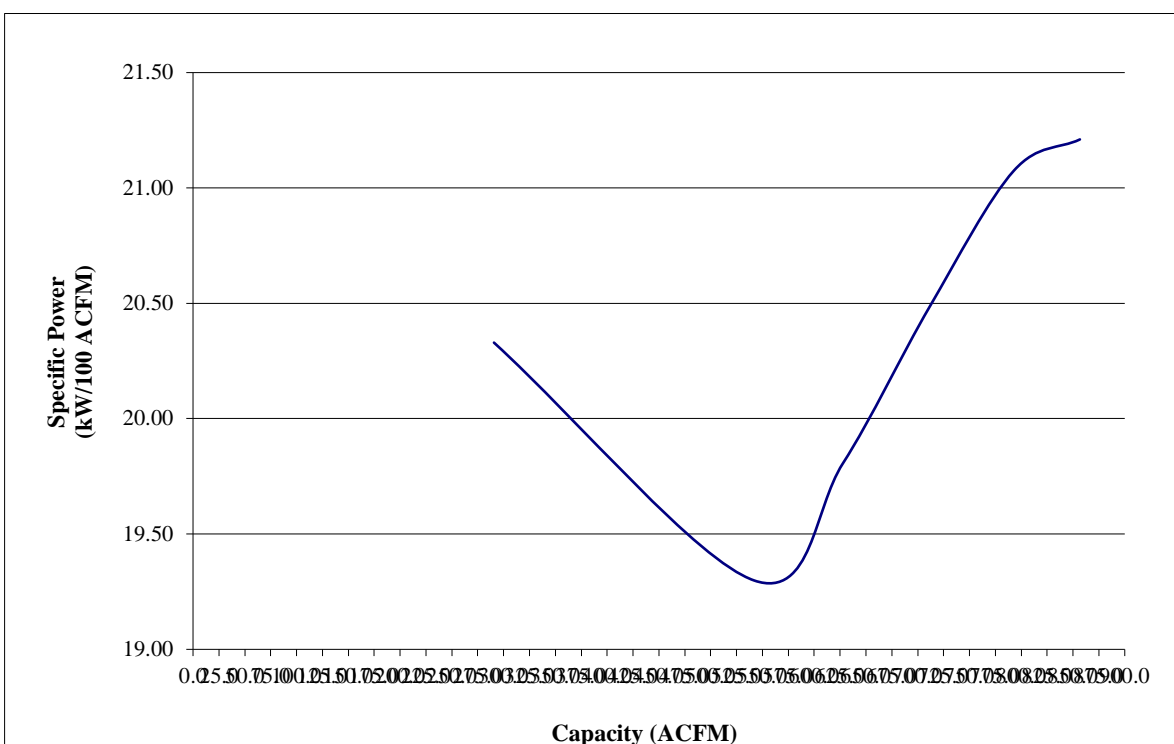


Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR			
1	Manufacturer: Chicago Pneumatic		
2	Model Number: CPVS 175	Date: May-15	
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: Screw	
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages: 1	
3	Rated Operating Pressure	116	psig ^b
4	Drive Motor Nominal Rating	180	hp
5	Drive Motor Nominal Efficiency	96.2	percent
6	Fan Motor Nominal Rating (if applicable)	8(x2)	hp
7	Fan Motor Nominal Efficiency	82.5	percent
8*	Input Power (kW)	Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	181.7 Max	856.7	21.21
	167.1	792.9	21.07
	145.7	711.3	20.48
	124.3	627.6	19.81
	104.6	542.0	19.30
	59.1 Min	290.7	20.33
9*	Total Package Input Power at Zero Flow ^{c, d}		kW
10	 <p style="text-align: center;">Capacity (ACFM)</p> <p style="text-align: center;">Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</p>		

*For models that are tested in the CAGI Performance Verification Program, these items are verified by program administrator

Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

NOTES:

- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; acfm is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.



Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
m^3 / min	ft^3 / min	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	