


Federal Uniform Test Method for Certain Air Compressors Not Applicable
Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR				
1	Manufacturer: Chicago Pneumatic			
2	Model Number: CPVS 340 at 102psi		Date:	06/18/26
	☒ Air-cooled	☐ Water-cooled	Type:	Screw
	☒ Lubricated	☐ Oil Free	# of Stages:	1
3*	Full Load Operating Pressure ^b	102	psig ^b	
4	Drive Motor Nominal Rating	340	hp	
5	Drive Motor Nominal Efficiency	96.5	percent	
6	Fan Motor Nominal Rating (if applicable)	11.4	hp	
7	Fan Motor Nominal Efficiency	89.5	percent	
8*	Input Power (kW)		Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	273.3		1548.1	17.65
	225.3		1313.9	17.15
	180.8		1080.2	16.74
	104.7		631.0	16.59
	73.0		420.8	17.35
9*	Total Package Input Power at Zero Flow ^{c, d}		0.0	kW
10	 Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity			

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
Consult CAGI website for a list of participants in the third party verification program: www.cagi.org

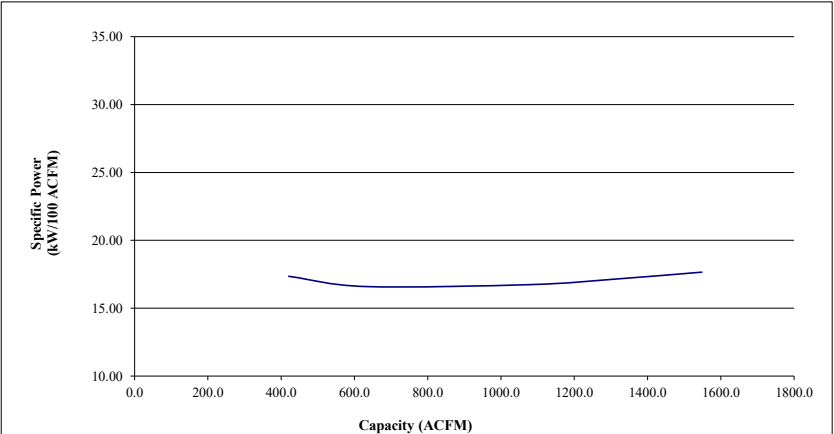

- NOTES:
- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
 - The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
 - No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
 - Tolerance is specified in ISO 1217, Annex E, as shown in table below:
- NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load Zero Flow Power
m^3 / min	ft^3 / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	
1.5 to 15	53 to 529.7	+/- 5	+/- 6	+/- 10%
Above 15	Above 529.7	+/- 4	+/- 5	